

Slim Line Industrial Ethernet Managed Switches

True Reliability, Performance and Value in a Compact Package

Product Highlights

- Slim packaging fits on your din rail
- High performance and value
- Truly industrial hardened design
- Advanced features and security

Real-time Secure Performance

- Rapid Spanning Tree (RSTP) for fast redundant rings
- SNMPv1 and v2 network management
- SNMPv3 authentication & encryption for security
- SNMP notifications (traps) for report on event
- Priority Queuing (QoS/CoS) for real-time operation
- IGMP for Multicast filtering (snooping & querying)
- VLAN for convenient traffic segregation
- Open-source programming for ultimate flexibility
- Broadcast & multicast storm protection
- RMON & port mirroring for advanced diagnostics
- Security with HTTPS, SSL, SSH, SNMPv3 & more

Trouble Free Operation

- Free field-installable upgrades forever
- UL, CSA (CUL), and CE certified
- Dual (redundant) power inputs with spike protection
- Self-test and alarm output contact
- Rugged corrosion-proof metal packaging
- DIN rail or direct panel mounting in multiple positions – No accessories required!

The Power of
Linux IPm
Inside



Certified to Perform:



ISO9001
Certified



European
Community



UL508
for Safety



USA/Canada
Emissions




Lead & Hazardous
Substance Free

5 or 8 Ports
with up to 2 Fiber



Ensure the reliability of your network with fast automatic switchover on a segment failure.

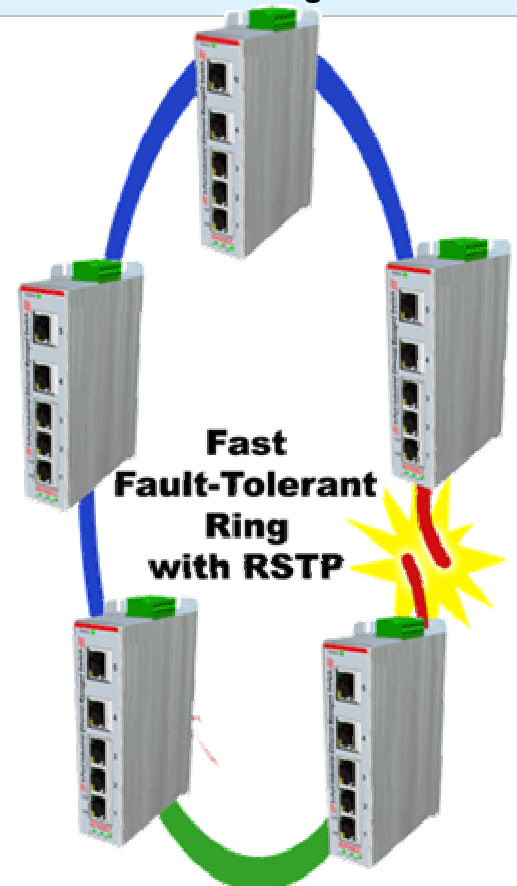

SIXNET Industrial Switches Make Your Job Easier

Why an Industrial Ethernet Switch

SIXNET switches are designed for industrial environments. Their rugged packaging and protected circuitry keep them working under conditions that will likely cause other switches to fail. Industrial applications are demanding – it gets hot, it gets cold – the power browns out or spikes wildly. You need a reliable industrial switch that can keep on going.

Enhanced Network Reliability and Performance

SIXNET managed switches detect and report network irregularities before serious problems can occur. These switches support SNMP (Simple Network Management Protocol) that allows you to monitor Ethernet and RMON statistics, and SNMP Notifications (traps) to report possible problems as they occur. Then the detailed information from these reliability-enhancing switches can point you to the source of the errors and eliminate hours of frustration while hunting down problems. These ultra-reliable switches will improve the overall performance of your network.

Fast Fault-Tolerant Redundancy

SIXNET managed switches ensure that your system stays running even after a break in a communications pathway. This is possible due to the Rapid Spanning Tree Protocol (RSTP) which lets you wire fault-tolerant loops or redundant rings within your Ethernet network. When a communications path is lost, the switches will automatically and quickly re-route messages through backup or alternate pathways.

Real-time Performance Ensures Deterministic Results

SIXNET managed switches intelligently route messages to eliminate collisions, and use priority queuing (QoS & CoS) to ensure that higher priority messages are delivered first and in real-time. This automatic capability maximizes your network performance by making sure that priority traffic such as I/O control messages are delivered without delay, giving your deterministic software the open communication channels it needs. These switches also support IGMP for IP Multicast filtering for use with industrial protocols like Ethernet/IP. Plus they support VLANs for convenient network segregation, and they automatically limit the number of broadcast and multicast messages to protect you from undesirable "broadcast storms" that can cripple your network.

Ultra-Reliability and True Industrial Performance

SIXNET managed switches are likely to provide maintenance free service for the life of your equipment. Reliability data reported from field installed units proves the amazing track record of these rugged industrial switches. On average, you will enjoy over 1,000,000 hours of trouble free operation before service is required on even one unit!

Advanced Security without Holes or Back Doors

The reality is that security is measured by its weaknesses, not its strengths. Unless your Ethernet switches have every aspect of security adequately protected, access to your network management is not secure. SIXNET managed switches make sure that you are completely secure, with no holes or "back doors" for hackers to sneak into. They include SSH (Secure Shell) for secure and encrypted terminal access, HTTPS protected web server (the same protocol used to manage many e-commerce sites), authenticated communications (user name and password), plus SNMP v3 which provides authenticated and encrypted SNMP messaging.

The LINUX Advantage - Free Industrial Computer with each SIXNET Managed Switch

The powerful IPm embedded-Linux engine is inside each SIXNET managed switch. The IPm engine provides a Linux computer with plenty of horsepower to run your own application programs. Save the expense of a separate computer and enhance the reliability of your systems through this cost-saving combination. Contact SIXNET for details.

Experience how easy it is to configure and use a SIXNET managed switch.




See the Live Demo!

<http://www.sixnetio.com/switch-demo.html>

SIXNET®

331 Ushers Road, P.O. Box 767 • Clifton Park, NY 12065 USA • <mailto:sales@sixnetswitch.com>
Phone: +1 (518) 877-5173 • Fax: +1 (518) 877-8346 • Web: <http://www.sixnetswitch.com>

Performance Specifications		
General	5 or 8 Ethernet ports	
Ethernet switch type	Managed	
Ethernet protocols supported	All IEEE 802.3	
RJ45 ports (shielded)	10/100BaseTX	
RJ45 speed (10 or 100 Mbps)	Auto-negotiation	
RJ45 MDI/MDIX	Auto-crossover	
RJ45 TD and RD polarity	Auto-polarity	
Fiber optic port speed	100BaseFX (100 Mbps)	
Fiber optic port wavelength	1300 nm center	
Fiber multimode (mm) typical	50 or 62.5/125 um (SC or ST)	
Fiber singlemode (sm) typical	9 or 10 /125 um (SC or ST)	
Fiber max. distance (full duplex) (see web for details)	4 (mm), 20 (sm) or 40 km (long haul) or more (contact SIXNET)	
Typical latency for 10 Mbps ports	16 us + frame time	Varies on load & settings
Typ. latency for 100 Mbps ports	5 us + frame time	
Full or half duplex operation	Configurable	
MAC addresses supported	2048	
Memory bandwidth	3.2 Gbps	
“OK” Output	Power & operational status	
Voltage	Same as switch input voltage	
Maximum current output	0.5 Amp	
Environmental	DIN rail or direct panel mounting	
Power input	Redundant input terminals	
Input power (typical - all ports active at 100 Mbps) (Max. 7 W)	3.6 W (5-port without fiber) 4.3 W (8-port without fiber) 5.6 W (5-port with 2 fiber) 6.3 W (8-port with 2 fiber)	
Input voltage (all models)	10-30 VDC (continuous)	
Transient protection	15,000 watts peak	
Spike protection	5,000 watts (10 times for 10 uS)	
Ethernet isolation	1500 VRMS 1 minute	
Operating temperature range	-10 to +60 °C	
Storage temperature range	-40 to +85 °C	
Humidity (non-condensing)	5 to 95% RH	
Vibration	IEC68-2-6	
Electrical safety	 UL508/CSA C22, EN61010-1	
EMI emissions		FCC part 15, ICES-003, EN55022
EMC immunity		IEC61326-1
Eye safety (fiber models)	IEC60825-1, Class 1; FDA 21 CFR 1040.10 and 1040.11	
Packaging material & protection	Aluminum with IP30 protection	
Dimensions (L x W x H)	See next page	

Specifications are subject to change. Consult factory for latest information.

Ordering Guide	
SL-5MS-1	5 RJ45 10/100 ports
SL-5MS-4SC	3 RJ45 ports & 2 multimode fiber optic port with SC or ST style connector
SL-5MS-4ST	3 RJ45 ports & 2 singlemode fiber optic port with SC or ST style connector
SL-5MS-5SC	3 RJ45 ports & 2 multimode fiber optic port with SC or ST style connector
SL-5MS-5ST	3 RJ45 ports & 2 singlemode fiber optic port with SC or ST style connector
SL-8MS-1	8 RJ45 10/100 ports
SL-8MS-4SC	6 RJ45 ports & 2 multimode fiber optic port with SC or ST style connector
SL-8MS-4ST	6 RJ45 ports & 2 singlemode fiber optic port with SC or ST style connector
SL-8MS-5SC	6 RJ45 ports & 2 multimode fiber optic port with SC or ST style connector
SL-8MS-5ST	6 RJ45 ports & 2 singlemode fiber optic port with SC or ST style connector
Accessories:	
RM-PS-024-01F	AC to 24VDC, 1A, with integrated power bus
ET-PS-024-02	AC to 24VDC, 2A, with compact packaging
SP-ETH-2	Dual port surge & lightning protector
RJ45-DB9F-CBL	PC to managed switch serial cable

Hardware Highlights:

- 5 or 8 port industrial Ethernet managed switch with up to two fiber optic ports (multimode or singlemode)
- Output for reporting power and operational status
- Redundant power with industrial surge/spike protection
- UL/CSA and CE rated for industrial applications
- DIN rail or direct panel mounting (no extra kits required)

Networking Features:

- Auto-detecting, auto-crossover and auto-polarity
- Store and forward wire speed switching
- Support for up to 2048 MAC addresses
- Full-Duplex operation with flow control (no collisions!)
- Rapid Spanning Tree (RSTP) for fault-tolerant loops
- Priority queuing for real-time performance
- SNMP v1 and V2 for network management
- SNMP v3 for authentication and encryption
- SNMP notifications (traps) for report on event
- IGMP v1 & v2 for IP multicast filtering
- VLAN (port & tag based) for traffic segregation
- Message filtering to stop broadcast/multicast storms
- RMON and port mirroring for diagnostics
- Configuration via secure (https) Web interface, Telnet / SSH (network), terminal (RS232) or SNMP (v1, v2, v3)

Ethernet Compliance:

- IEEE 802.3 (10Mbps Ethernet supports legacy devices)
- IEEE 802.3u (Fast Ethernet 100Mbps for newer devices)
- IEEE 802.3x (Full-Duplex with Flow Control)
- IEEE 802.1D/w (Rapid Spanning Tree for redundant rings and Spanning Tree for interoperability)
- IEEE 802.1p (Priority Queuing – QoS, CoS, ToS/DS)
- IEEE 802.1Q (VLAN for traffic segregation)

Additional features are in the works and are provided through FREE Firmware Upgrades. Contact SIXNET for the latest information.




SIXNET also offers slim line industrial Ethernet unmanaged switches and media converters that offer ultra-reliability and low cost in the same package!

SIXNET®


331 Ushers Road, P.O. Box 767 • Clifton Park, NY 12065 USA • <mailto:sales@sixnetswitch.com>
 Phone: +1 (518) 877-5173 • Fax: +1 (518) 877-8346 • Web: <http://www.sixnetswitch.com>

Mechanical Dimensions

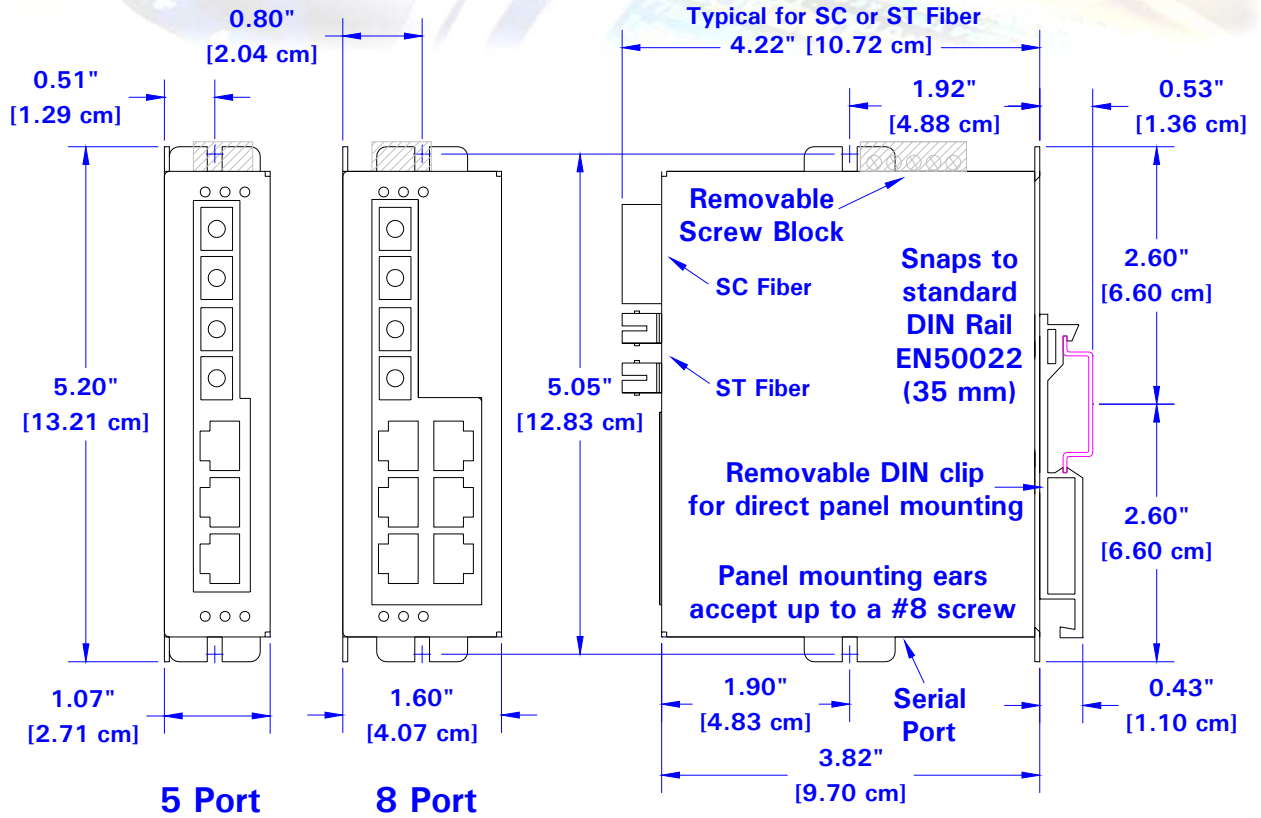

Optional Mounting Positions


Snap On
DIN Rail
Mounting



Vertical
Direct to
Panel
Mounting




Horizontal
Direct to Panel
Mounting

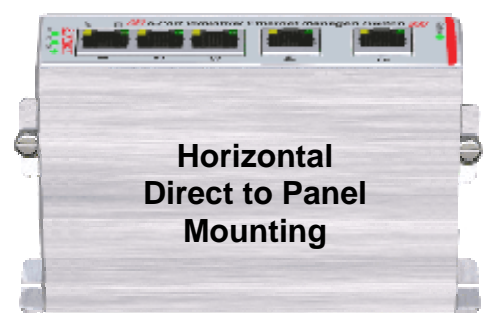


Power and Alarm Connections

Single DC Power

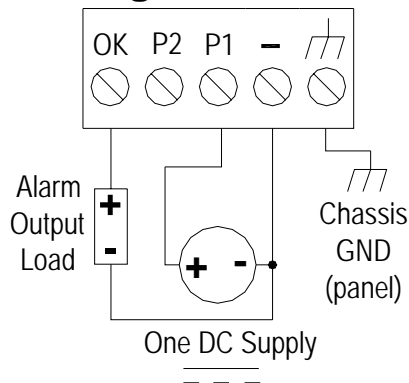

Redundant DC Power

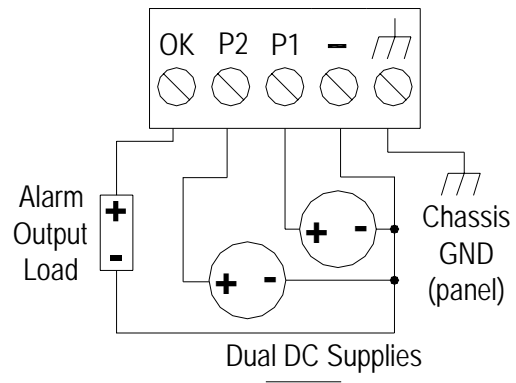

SIXNET®

331 Ushers Road, P.O. Box 767 • Clifton Park, NY 12065 USA • <mailto:sales@sixnetswitch.com>
Phone: +1 (518) 877-5173 • Fax: +1 (518) 877-8346 • Web: <http://www.sixnetswitch.com>

A Complete Family of Automation & Connectivity Solutions

Ethernet and RS485 I/O

SIXNET can provide you the building blocks for the open systems you are looking for. Three complementary families of modular DIN rail mounted I/O provide local, remote, enterprise level, or Internet I/O solutions.




Industrial Telephone Modems

SIXNET rugged industrial modems eliminate the hassles of mounting a telephone modem in an industrial enclosure. These robust modems are rated for -30 to +70 °C industrial operation.

More Industrial Ethernet Switches

SIXNET offers a full line of unmanaged, ring, managed and gigabit Industrial Ethernet switches. All these advanced switches are rugged, reliable and provide real-time performance.

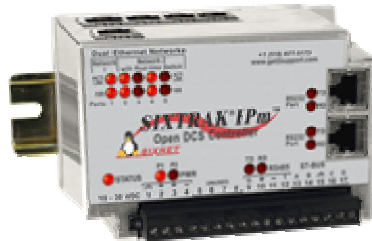

Controllers & RTUs with Open-Source Linux

SIXNET IPm is a combination of installation-ready industrial controllers & RTUs and a wealth of powerful software solutions. IPm offers the reliability of a PLC, the familiarity of powerful Windows programming and configuration utilities, all combined with powerful open-source Linux flexibility.



Request Your
FREE Product CD at
<http://www.sixnetswitch.com>

Contact your SIXNET Applications Engineer Today!

For the latest information, check out
<http://www.sixnetswitch.com>

Slim Managed Switch Datasheet REV 4-Jan-07

SIXNET

331 Ushers Road, P.O. Box 767 • Clifton Park, NY 12065 USA • <mailto:sales@sixnetswitch.com>
Phone: +1 (518) 877-5173 • Fax: +1 (518) 877-8346 • Web: <http://www.sixnetswitch.com>